



CLEANPOX


SOLVENT BASED LIQUID CLEANER FOR EPOXY PRODUCTS
FOR CLEANING CERAMIC TILES, NATURAL STONES AND CONCRETE



CHARACTERISTICS	ENVIRONMENTAL	METHOD OF USE	PRECAUTIONS
 S SOLVENT BASED		 APPLY BY BRUSH	

PROBLEM

REMOVING EPOXY RESIN DIRT WITHOUT RUINING THE TILED SURFACES

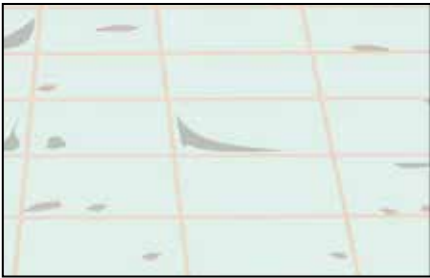

Unless the leftovers of epoxy-based products used to lay ceramic tiles are removed straight after grouting, they have to be cleaned thoroughly using a product that does not ruin the tiled surface.

SOLUTION

CLEANPOX is a specific product with a special organic solvent base. Its special features are that it does not develop toxic vapours that are harmful to health and it maintains an efficient scale removing action at the same time.

APPLICATION FIELDS

CLEANPOX is used to eliminate traces of epoxy resin on ceramic floor and wall tiles.

ADVANTAGES

- It does not develop vapours that are harmful to health.
- It does not ruin the tiled surfaces.
- It cleans the tiles quickly and easily.

METHOD OF USE

Brush the liquid **CLEANPOX** product over the surface and leave to work for approximately 5 minutes then, again using a brush, possibly with the aid of a spatula and scouring sponge, eliminate any stubborn scale left on the surface.


Dry the floor and rinse abundantly with water.

• COVERAGE

Variable consumption: from 100 and 200 g/m².

• PRECAUTIONS

- Do not use on marble, limestone or glazed wall or floor tiles that are not resistant to acids.

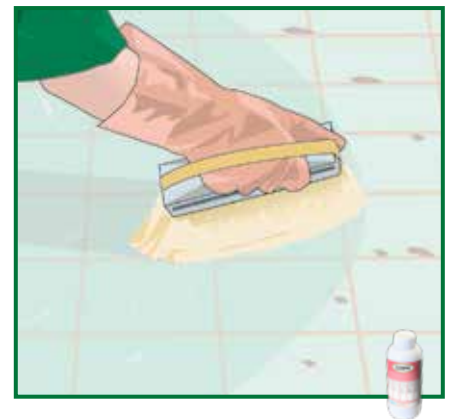

TECHNICAL CHARACTERISTICS

	Standard	CLEANPOX
Appearance		Liquid
Colour		Transparent
Density		1.10 kg/L
pH		1.1
Active content		15%
Storage in original packaging in a dry place		12 months
Workability		
Application temperature		+0°C ÷ +40°C
Application		Manual

the numerous possible uses and the possible interference of conditions or elements beyond our control, we assume no responsibility regarding the results which are obtained. The purchasers, of their own accord and under their own responsibility, must establish the suitability of the product for the envisaged use.

The figures shown are average indicative figures relevant to current production and may be changed or updated by INDEX at any time without previous warning. The advice and technical information provided, is what results from our best knowledge regarding the properties and the use of the product. Considering

PACKAGING

1-kg-Bottle in 12-bottles box

• FOR ANY FURTHER INFORMATION OR ADVICE ON PARTICULAR APPLICATIONS, CONTACT OUR TECHNICAL OFFICE • IN ORDER TO CORRECTLY USE OUR PRODUCTS, REFER TO INDEX TECHNICAL SPECIFICATIONS •

 <p>Construction Systems and Products</p> <p>Via G. Rossini, 22 - 37060 Castel D'Azzano (VR) - Italy - C.P.67 T. +39 045 8546201 - F. +39 045 518390</p>	<p>Internet: www.index-spa.com Informazioni Tecniche Commerciali tecom@indexspa.it Amministrazione e Segreteria index@indexspa.it Index Export Dept. index.export@indexspa.it</p>		<p>TOTAL QUALITY index</p>  <p>UNI EN ISO 9001</p>	<p>Environmental Management Systems index</p>  <p>UNI EN ISO 14001</p>	 <p>socio del GBC Italia</p>	
--	--	---	--	---	---	---