




GIPSCOLL is an adhesive obtained by incorporating additives in the production phase of plaster grouting.

GIPSCOLL is used to glue pre-coupled lined plasterboard panels to walls and concrete, such as SILENTGips, SILENTIGipsalu and TOPSILENTDuogips, or to glue panels of TOPSILENTEco.

The **GIPSCOLL** mix can be applied using a trowel, in spots or strips, on the walls or on the materials to be glued. When positioning the panels, they should be pressed sufficiently against the wall in order to "squash" the adhesive so that there is sufficient adhesion surface.

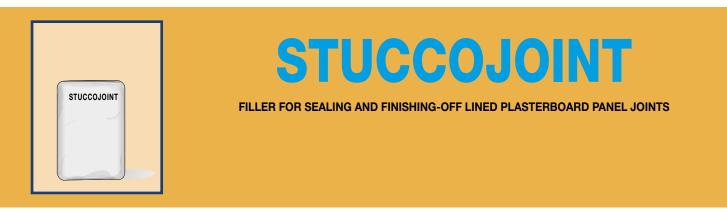


STUCCOJOINT filler is used to finish-off panels of glass wool pre-coupled with plasterboard, such as SILENTGips, SILENTGipsalu, and panels of TOPSILENTGips and TOPSILENTDuogips..

It can also be used to completely skim the above-mentioned panels or to repair damaged panels.

The joints must be previously reinforced and sealed with NASTROGIPS.

When used as a skimmer, it is advisable to apply two coats of STUCCOJOINT.

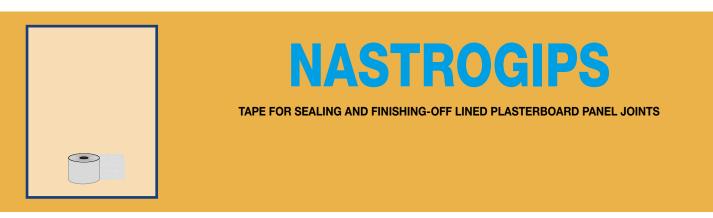

NASTROGIPS is a netted joint-covering tape. It is used to seal panels of SILENTGips, SILENTGipsalu, TOPSILENTGips and TOPSILENTDuogips in acoustic insulation systems.

The joints covered with NASTROGIPS must then be finished-off with STUCCOJOINT filler to skim the panels.



