





SANICLEAN

THE MOULD REMOVER
LIQUID DETERGENT FOR QUICKLY CLEANING MOULD OFF WALLS




GRANTS *LEED* CREDITS

CARATTERISTICHE		IMPATTO AMBIENTALE	MODALITÀ D'IMPIEGO	AVVERTENZE
 ONE-COMPONENT	 WATER BASED		 APPLICAZIONE A SPRUZZO	 STORAGE: KEEP AWAY FROM FROST

PROBLEM

CLEAN MOULD AND ALGAE OFF INTERIOR AND EXTERIOR WALLS

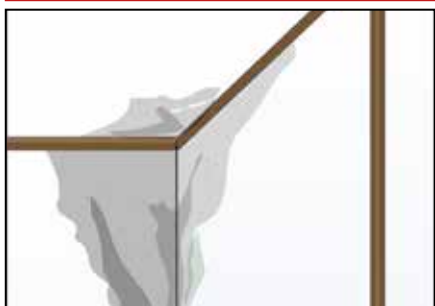

SOLUTION

SANICLEAN is a detergent for quickly cleaning walls infested with mould and algae, based on sodium hypochlorite in aqueous solution. Its oxidising and bleaching action removes the microorganisms on surfaces, before they are painted.

APPLICATION FIELDS

SANICLEAN is suitable for cleaning surfaces in general, and in particular for environments with very widespread infestations. For permanent protection against microorganisms, after **SANICLEAN**, the sanitizing product **SANIPROTECT** can be applied according to the methods indicated in the relative technical data sheet.

ADVANTAGES

- Cleans off mould and algae quickly.
- Can also be applied to finished surfaces.

METHOD OF USE

The product is ready to use and does not need diluting. Apply straight onto a dry surface using the spray nozzle provided (1) (it is recommended not to mechanically remove the mould before use).

Leave the product to work for 30 minutes to 3-4 hours (the time depends on the amount of product applied and the mould on the wall),

then rinse the surface well with water. Repeat the treatment for very extensive and persistent areas of mould.

This application is sufficient to clean mould off a surface, but for a longer-lasting effect, it may be advisable to apply **SANIPROTECT** - "The mould stopper" which can penetrate deep into the wall and stop mould forming (2).


• COVERAGE

The yield is variable and depends on the type of surface, but is generally estimated to be between 5 and 10 m²/litre.


• PRECAUTIONS

- Keep the containers sealed before use.
- Shake the container before use.
- Air the room during and after application.
- Apply at temperatures between +5°C and +35°C.
- After use clean the tools with water.
- Store the packages in a sheltered place, where the temperature is above +5°C.

1

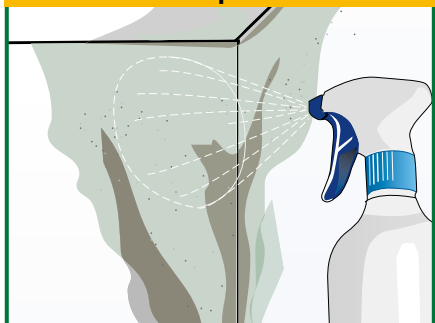

2

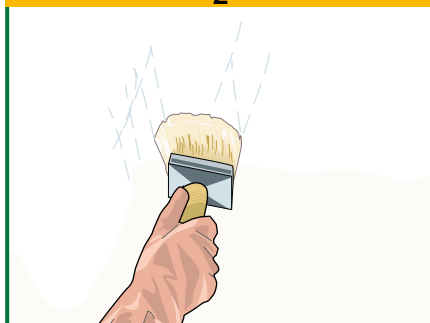

TECHNICAL CHARACTERISTICS

	Standard	SANICLEAN
Appearance		Liquid
Colour		transparent
Density	EN 2811-1	1.15 ± 0.15 kg/L
Storage in original packaging in a dry place		24 months

the numerous possible uses and the possible interference of conditions or elements beyond our control, we assume no responsibility regarding the results which are obtained. The purchasers, of their own accord and under their own responsibility, must establish the suitability of the product for the envisaged use.

The figures shown are average indicative figures relevant to current production and may be changed or updated by INDEX at any time without previous warning. The advice and technical information provided, is what results from our best knowledge regarding the properties and the use of the product. Considering

PACKAGING

Bottle 1.0 litres.

• FOR ANY FURTHER INFORMATION OR ADVICE ON PARTICULAR APPLICATIONS, CONTACT OUR TECHNICAL OFFICE • IN ORDER TO CORRECTLY USE OUR PRODUCTS, REFER TO INDEX TECHNICAL SPECIFICATIONS •

 <p>index Construction Systems and Products</p> <p>Via G. Rossini, 22 - 37060 Castel D'Azzano (VR) - Italy - C.P.67 T. +39 045 8546201 - F. +39 045 518390</p>	<p>Internet: www.index-spa.com Informazioni Tecniche Commerciali tecom@indexspa.it Amministrazione e Segreteria index@indexspa.it Index Export Dept. index.export@indexspa.it</p>		<p>TOTAL QUALITY index</p>  <p>UNI EN ISO 9001</p>	<p>Environmental Management Systems index</p>  <p>UNI EN ISO 14001</p>	 <p>index socio del GBC Italia</p>	
--	--	---	--	---	--	---