



# SANIPROTECT

THE MOULD STOPPER  
LIQUID SANITIZER FOR PROTECTION AGAINST MOULD ON WALLS




GRANTS *LEED* CREDITS

| CHARACTERISTICS |                  | ENVIRONMENTAL | METHOD OF USE  | PRECAUTIONS   |
|-----------------|------------------|---------------|--|---|
| A               | H <sub>2</sub> O |               |  |  |
| ONE-COMPONENT   | WATER BASED      |               | APPLY BY BRUSH   | STORAGE: KEEP AWAY FROM FROST   |

## PROBLEM

**CLEAN INTERIOR AND EXTERIOR WALLS INFESTED BY MICROORGANISMS AND PREVENT REGROWTH**

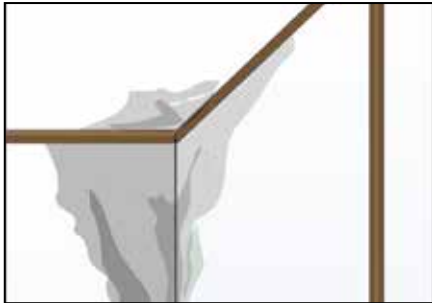

## SOLUTION

**SANIPROTECT** is an aqueous solution with a sanitizing action which, due to its composition based on specific substances able to penetrate deep into the support, is effective in preventing the formation of mould and algae.

## APPLICATION FIELDS

**SANIPROTECT** is suitable for protection against microorganisms on walls before they are painted. It can also be applied on paint and tiled surfaces.


## ADVANTAGES

- Protection against new proliferations of microorganisms.
- Can also be applied to finished surfaces.
- Colourless and non-film-forming

## METHOD OF USE

For surfaces covered in mould and algae, apply the detergent **SANICLEAN** - "The mould remover", according to the methods indicated in the technical data sheet (1).

**SANIPROTECT** is ready to use and does not need diluting. It can be applied straight onto a dry surface.

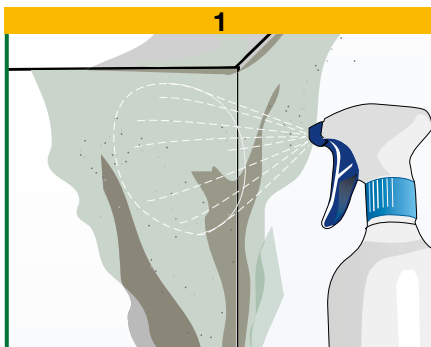

The product can be applied with a paintbrush (2).

You can repeat the treatment to make the surface more repellent.

At the end of the treatment the surface must not be rinsed.

Then you can paint the surface at least 24



hours after the sanitizing treatment. It is recommended to apply paints with mould prevention properties, such as **DRYWALL**, **EXTRAQUARTZ** Paint, **EXTRA** Paint and **SILICOLOR EXTRA-PAINTE**.

### • COVERAGE

The yield is very variable and depends on the type of surface, but is generally estimated to be between 7 and 10 m<sup>2</sup>/litre.

### • PRECAUTIONS

- Keep the containers sealed before use.
- Shake the container before use.
- Air the room during and after application.
- Apply at temperatures between +5°C and +35°C.
- After use clean the tools with water.
- Store the packages in a sheltered place, where the temperature is above +5°C.

## TECHNICAL CHARACTERISTICS

|  | Standard  | SANIPROTECT      |
|--|-----------|------------------|
| Appearance                                   |           | Liquid           |
| Colour                                       |           | transparent      |
| Density                                      | EN 2811-1 | 1.00 ± 0.10 kg/L |
| Storage in original packaging in a dry place |           | 12 months        |

the numerous possible uses and the possible interference of conditions or elements beyond our control, we assume no responsibility regarding the results which are obtained. The purchasers, of their own accord and under their own responsibility, must establish the suitability of the product for the envisaged use.

The figures shown are average indicative figures relevant to current production and may be changed or updated by INDEX at any time without previous warning. The advice and technical information provided, is what results from our best knowledge regarding the properties and the use of the product. Considering

## PACKAGING

Bottle 1.0 litres.

• FOR ANY FURTHER INFORMATION OR ADVICE ON PARTICULAR APPLICATIONS, CONTACT OUR TECHNICAL OFFICE • IN ORDER TO CORRECTLY USE OUR PRODUCTS, REFER TO INDEX TECHNICAL SPECIFICATIONS •

|  |  |   |  |   |  |  |
|--|--|---|--|---|--|--|
|  <p><b>index</b><br/>Construction Systems and Products</p> <p>Via G. Rossini, 22 - 37060 Castel D'Azzano (VR) - Italy - C.P.67<br/>T. +39 045 8546201 - F. +39 045 518390</p> | <p>Internet: <a href="http://www.index-spa.com">www.index-spa.com</a><br/>                 Informazioni Tecniche Commerciali<br/> <a href="mailto:tecom@indexspa.it">tecom@indexspa.it</a><br/>                 Amministrazione e Segreteria<br/> <a href="mailto:index@indexspa.it">index@indexspa.it</a><br/>                 Index Export Dept.<br/> <a href="mailto:index.export@indexspa.it">index.export@indexspa.it</a></p> |  | <p>TOTAL QUALITY<br/><b>index</b></p>  <p>UNI EN ISO<br/><b>9001</b></p> | <p>Environmental<br/>Management Systems<br/><b>index</b></p>  <p>UNI EN ISO<br/><b>14001</b></p> |  <p><b>index</b><br/>socio del GBC Italia</p> |  <p><b>lavorosicuro</b></p> |
|--|--|---|--|---|--|--|